

Product Features

- ✧ Up to 155Mbps data-rate
- ✧ TX1550nm DFB laser
- ✧ RX1490 PIN photo detector for 80km transmission
- ✧ BIDI LC/UPC type pluggable optical interface
- ✧ Compliant with SFP MSA and SFF-8472 with simplex LC receptacle
- ✧ RoHS compliant and lead-free
- ✧ Single +3.3V power supply
- ✧ Support Digital Diagnostic Monitoring interface
- ✧ Case operating temperature Commercial: 0°C to +70°C
 - Extended: -10°C to +80°C
 - Industrial: -40°C to +85°C



Applications

- ✧ SDH STM-1, S-1.1,L-1.1, L-1.2
- ✧ SONET OC-3 IR1,LR1,LR2
- ✧ Other Optical Links

Ordering Information

| Part Number | Output Power | Rec. Sens | Data Rate | Wavelength | Distance |
|-----------------------|--------------|-----------|-----------|-----------------|----------|
| <i>FH-SB5401CDL80</i> | -6 ~ 1db | -36db | 155M | TX1550/RX1490nm | 80km |

General

FH-SB5401CDL80 Small Form Factor Pluggable (SFP) transceivers are compatible with the Small Form Factor Pluggable Multi-Sourcing Agreement (MSA). They simultaneously comply with Gigabit Ethernet as specified in IEEE STD 802.3 and 1x Fibre Channel as defined in FC-PI-2 Rev. 10.0 .They are RoHS compliant and lead-free

Absolute Maximum Ratings

| Parameter | Symbol | Min. | Max. | Unit | Note |
|---------------------|--------|------|------|------|------|
| Supply Voltage | Vcc | -0.5 | 4.0 | V | |
| Storage Temperature | | -40 | 85 | °C | |
| Relative Humidity | | 5 | 85 | % | |

Note: Stress in excess of the maximum absolute ratings can cause permanent damage to the module

General Operating Characteristics

| Parameter | Symbol | Min. | Typ | Max. | Unit | Note |
|----------------------|------------------|------|-----|------|------|------|
| Data Rate | | | 155 | | Gb/s | |
| Supply Voltage | Vcc | 3.13 | 3.3 | 3.47 | V | |
| Supply Current | Icc _s | | | 220 | mA | |
| Operating Case Temp. | Tc | 0 | | 70 | °C | |
| | | -10 | | 80 | °C | |
| | | -40 | | 85 | °C | |

Electrical Input/Output Characteristics

Transmitter

| Parameter | Symbol | Min. | Typ | Max. | Unit | Note |
|---------------------------|--------|------|-----|---------|------|------|
| Diff. input voltage swing | | 120 | | 820 | mVpp | 1 |
| Tx Disable input | H | VIH | 2.0 | Vcc+0.3 | V | |
| | L | VIL | 0 | 0.8 | | |
| Tx Fault output | H | VOH | 2.0 | Vcc+0.3 | V | 2 |
| | L | VOL | 0 | 0.8 | | |
| Input Diff. Impedance | Zin | | 100 | | Ω | |

Receiver

| Parameter | Symbol | Min. | Typ | Max. | Unit | Note |
|----------------------------|--------|------|-----|---------|------|------|
| Diff. output voltage swing | | 340 | 650 | 800 | mVpp | 3 |
| Rx LOS Output | H | VOH | 2.0 | Vcc+0.3 | V | 2 |
| | L | VOL | 0 | 0.8 | | |

Note 1) TD+/- are internally AC coupled with 100Ω differential termination inside the module.

Note 2) Tx Fault and Rx LOS are open collector outputs, which should be pulled up with 4.7k to 10kΩ resistors on the host board.
Pull up voltage between 2.0V and Vcc+0.3V.

Note 3) RD+/- outputs are internally AC coupled, and should be terminated with 100Ω (differential) at the user SERDES.

Optical Characteristics

Transmitter

| Parameter | Symbol | Min. | Typ | Max. | Unit | Note |
|-----------------------------|---|------|------|------|------|------|
| Operating Wavelength | λ_C | 1530 | 1550 | 1570 | nm | |
| Ave. output power (Enabled) | Po | -6 | | 1 | dBm | 1 |
| Extinction Ratio | ER | 10 | | | dB | 1 |
| RMS spectral width | $\Delta\lambda$ | | | 4 | nm | |
| Rise/Fall time (20%~80%) | Tr/Tf | | | 0.26 | ps | 2 |
| Output Eye Mask | Compliant with IEEE802.3 z (class 1 laser safety) | | | | | |

Note 1 Measure at 2²³-1 NRZ PRBS pattern

2 Transmitter eye mask definition


Receiver

| Parameter | Symbol | Min. | Typ | Max. | Unit | Note |
|----------------------|--------|------|------|------|------|------|
| Operating Wavelength | | 1470 | 1490 | 1510 | nm | |
| Sensitivity | Psen | | | -36 | dBm | 1 |
| Min. overload | Pimax | -3 | | | dBm | |
| LOS Assert | Pa | -45 | | | dBm | |
| LOS De-assert | Pd | | | -37 | dBm | 2 |
| LOS Hysteresis | Pd-Pa | 0.5 | | 6 | dB | |

Note 1) Measured with Light source 1310nm, ER=9dB; BER = 10^{-12} @PRBS=2²³-1 NRZ.

2) When LOS de-asserted, the RX data+/- output is signal output.

Pin Definitions And Functions

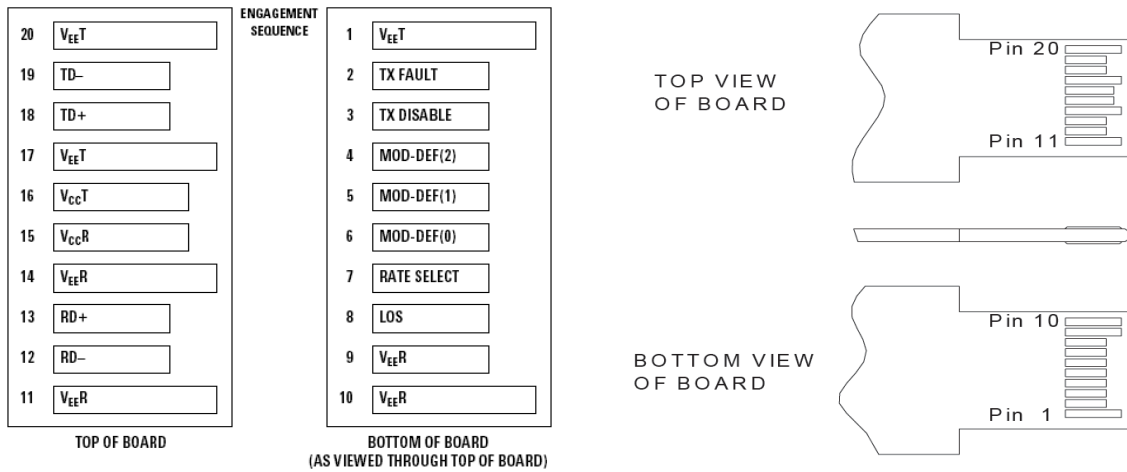

| PIN# | Name | Function | Notes |
|------|-------------|--|-------|
| 1 | VeeT | Tx ground | |
| 2 | Tx Fault | Tx fault indication, Open Collector Output, active "H" | 1 |
| 3 | Tx Disable | LVTTL Input, internal pull-up, Tx disabled on "H" | 2 |
| 4 | MOD-DEF2 | 2 wire serial interface data input/output (SDA) | 3 |
| 5 | MOD-DEF1 | 2 wire serial interface clock input (SCL) | 3 |
| 6 | MOD-DEF0 | Model present indication | 3 |
| 7 | Rate select | No connection | |
| 8 | LOS | Rx loss of signal, Open Collector Output, active "H" | 4 |
| 9 | VeeR | Rx ground | |
| 10 | VeeR | Rx ground | |
| 11 | VeeR | Rx ground | |
| 12 | RD- | Inverse received data out | 5 |
| 13 | RD+ | Received data out | 5 |
| 14 | VeeR | Rx ground | |
| 15 | VccR | Rx power supply | |
| 16 | VccT | Tx power supply | |
| 17 | VeeT | Tx ground | |

| | | | |
|----|------|--------------------------|---|
| 18 | TD+ | Transmit data in | 6 |
| 19 | TD- | Inverse transmit data in | 6 |
| 20 | VeeT | Tx ground | |

Notes:

1) When high, this output indicates a laser fault of some kind. Low indicates normal operation. And should be pulled up with a 4.7 – 10KΩ resistor on the host board.

2) TX disable is an input that is used to shut down the transmitter optical output. It is pulled up within the module with a 4.7 – 10KΩ resistor. Its states are:

Low (0 – 0.8V): Transmitter on (>0.8, < 2.0V): Undefined

High (2.0V~Vcc+0.3V): Transmitter Disabled Open: Transmitter Disabled

3) Mod-Def 0,1,2. These are the module definition pins. They should be pulled up with a 4.7K – 10KΩ resistor on the host board. The pull-up voltage shall be VccT or VccR.

Mod-Def 0 has been grounded by the module to indicate that the module is present

Mod-Def 1 is the clock line of two wire serial interface for serial ID

Mod-Def 2 is the data line of two wire serial interface for serial ID

4) When high, this output indicates loss of signal (LOS). Low indicates normal operation.


5) RD+/-: These are the differential receiver outputs. They are AC coupled 100Ω differential lines which should be terminated with 100Ω (differential) at the user SERDES. The AC coupling is done inside the module and is thus not required on the host board.

6) TD+/-: These are the differential transmitter inputs. They are AC-coupled, differential lines with 100Ω differential termination inside the module. The AC coupling is done inside the module and is thus not required on the host board.


Diagnostics

| Parameter | Range | Unit | Accuracy | Calibration |
|--------------|------------------------|------|----------|--------------------|
| Temperature | 0 to +70 -40 to +85 | °C | ±3°C | Internal/ External |
| Voltage | 3.0 to 3.6 | V | ±3% | Internal/ External |
| Bias Current | 2 to 80 | mA | ±10% | Internal/ External |
| TX Power | -8 to 3 | dBm | ±3dB | Internal/ External |
| RX Power | -39 to 0 | dBm | ±3dB | Internal/ External |


Functional Diagram

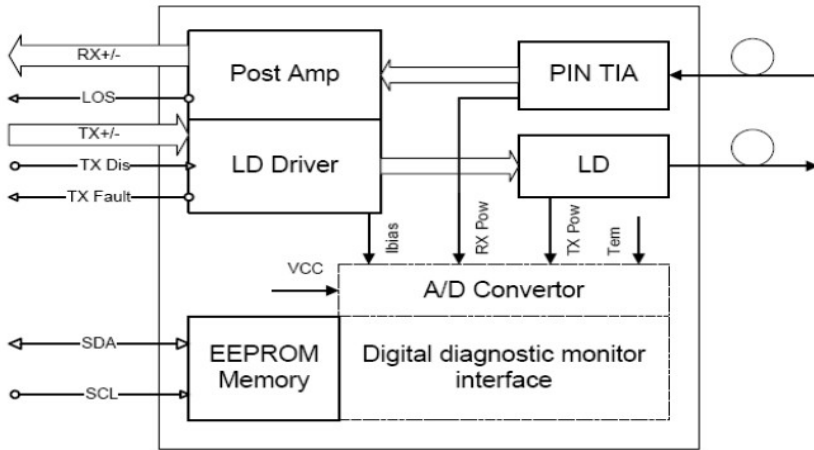

TYPICAL INTERFACE CIRCUIT

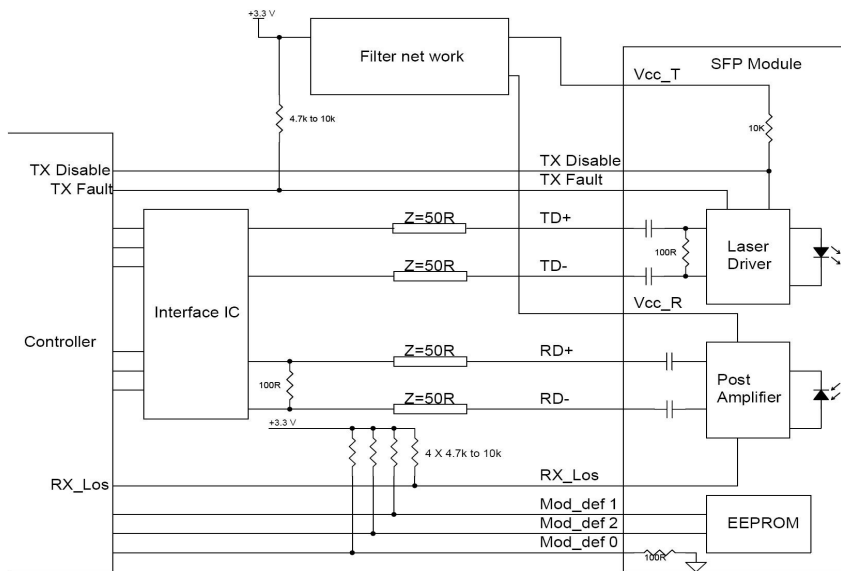

Package Dimensions

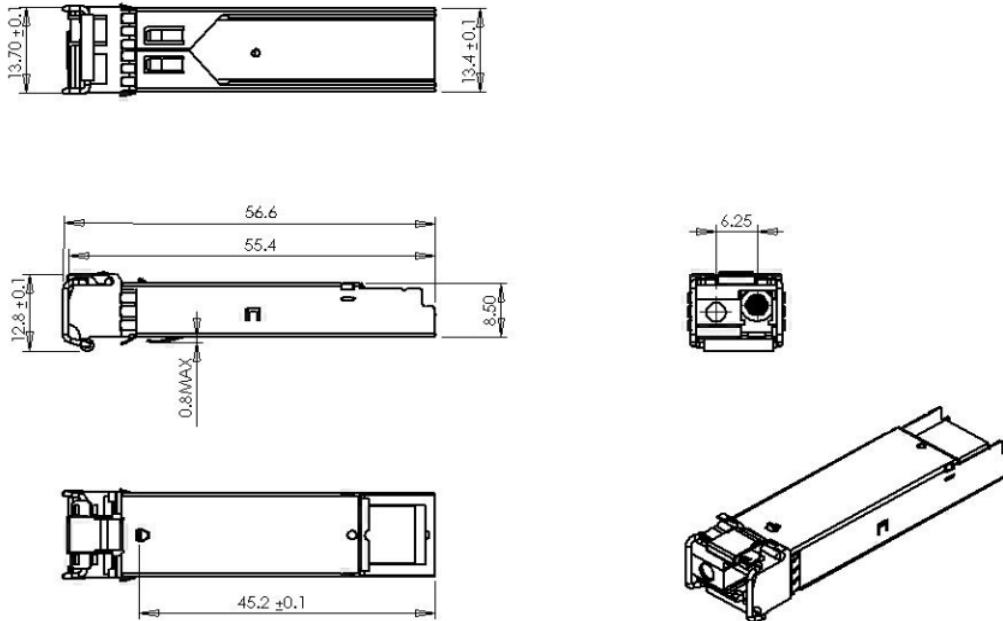

For More Information

FANG HANG TECH LIMITED

Add: Room 908, Jingyuan Building, 28 Bulong Rd, Longgang District, Shenzhen China

Tel: +86-755-89584520

Fax: +86-755-89584520

sales@fanghangtech.com

www.fanghangtech.com